



KAD AIR CONDITIONING

KAD Access Doors



The KAD Access Door provides quick easy and economical option wherever duct access is needed. Cam-lock system assures the tight closure and continuous piano hinges model provide smooth operation.

Access Doors features:

Meet SMACNA Construction Standard for system upto 2" Wg (500 Pa) | Available in 1" or 2" Insulation
Plated steel cam-lock fastener | Notched lock over tap | Positive seal polyethylene or neoprene



ISO 9001:2015 Certified Company

Model : K-AD-25




- Frame is manufactured from 22 gauge upto 12 gauge galvanized steel sheet of G-90 zinc coating
- Door is manufactured from double skin galvanized steel sheet with fiberglass insulation of 24 to 32 kg/m³ density inside
- Cam-lock: Galvanized steel quick release cam-lock is provided for positive closure
- Gasket: 1" wide neoprene or rubber foam gasket is provided for positive closure
- Available in stainless steel and Aluminum construction
- Available in 2" thick insulation

Model : K-ADH-25



- Frame is manufactured from 22 gauge upto 12 gauge galvanized steel sheet of G-90 zinc coating
- Door is manufactured from double skin galvanized steel sheet with fiberglass insulation of 24 to 32 kg/m³ density inside
- Cam-lock: Galvanized steel quick release cam-lock is provided for positive closure
- Piano hinges: Continuous piano hinges are provided on one side of the door
- Gasket: 1" wide neoprene or rubber foam gasket is provided for positive closure
- Available in stainless steel and Aluminum construction
- Available in 2" thick insulation

Model : K-ADH-C-25

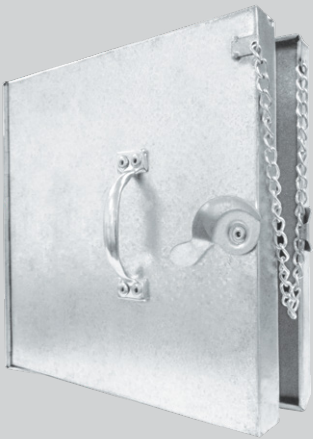


- Frame is manufactured from 22 gauge upto 12 gauge galvanized steel sheet of G-90 zinc coating
- Door is manufactured from double skin galvanized steel sheet with fiberglass insulation of 24 to 32 kg/m³ density inside
- Cam-lock: Galvanized steel quick release cam-lock is provided for positive closure
- Piano hinges: Continuous piano hinges are provided on one side of the door
- Safety chain is provided as an additional safety feature
- Gasket: 1" wide neoprene or rubber foam gasket is provided for positive closure
- Available in stainless steel and Aluminum construction
- Available in 2" thick insulation

Standard available sizes

1	4" x 4"	6	10" x 8"
2	4" x 6"	7	10" x 10"
3	6" x 6"	8	12" x 10"
4	6" x 8"	9	12" x 12"
5	8" x 8"	10	14" x 14"

Engineering concept

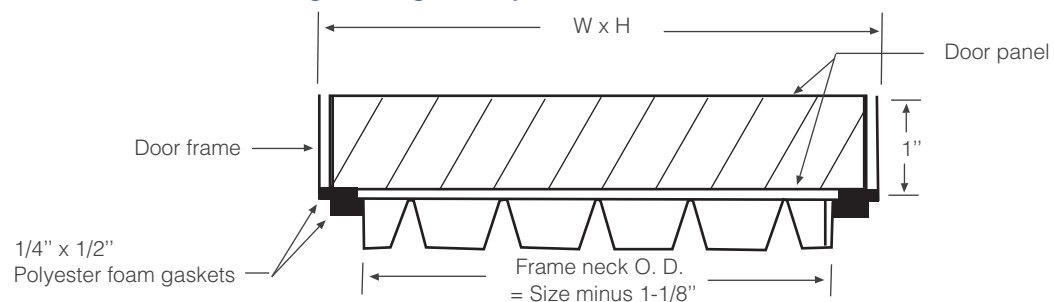

KAD AIR CONDITIONING EST.

P.O. Box 5389, Dubai, UAE. Tel: +971 4 806 7680 Fax: +971 4 806 7688

Email: info@kadairconditioning.com Web: www.kadairconditioning.com